

**WIRE SHELVES** — see spec sheet **1.00** 

**SHELVING**

Add suffix "Z" ( **EAGLEbrite**<sup>®</sup> zinc), "C" (chrome), "V" ( **VALU-MASTER**<sup>®</sup> pewter gray epoxy), "E" ( **EAGLEgard**<sup>®</sup> green epoxy), or "S" (stainless steel) to model number when ordering. For example: 1424E indicates a shelf with **EAGLEgard**<sup>®</sup> green epoxy. Packaging: 24" through 48" (610 – 1219mm) lengths are packed four to a box. 54" through 72" (1372 – 1829mm) lengths are packed two per box. Four pairs of split sleeves provided with each shelf.




wire shelf

width x length		weight	cu.	model#	
in.	mm				lb.
14" x 24"	356 x 610	6	2.7	0.5	1424
14" x 30"	356 x 762	7	3.2	0.5	1430
14" x 36"	356 x 914	8	3.6	0.5	1436
14" x 42"	356 x 1067	9	4.1	0.7	1442
14" x 48"	356 x 1219	10	4.6	0.7	1448
14" x 54"	356 x 1372	12	5.5	0.9	1454
14" x 60"	356 x 1524	14	6.4	0.9	1460
14" x 72"	356 x 1829	17	7.7	1.1	1472
18" x 24"	457 x 610	7	3.2	0.7	1824
18" x 30"	457 x 762	8	3.6	0.7	1830
18" x 36"	457 x 914	9	4.1	0.7	1836
18" x 42"	457 x 1067	11	5.0	0.9	1842
18" x 48"	457 x 1219	12	5.5	0.9	1848
18" x 54"	457 x 1372	15	6.8	1.2	1854
18" x 60"	457 x 1524	17	7.7	1.2	1860
18" x 72"	457 x 1829	20	9.1	1.3	1872
21" x 24"	533 x 610	8	3.6	0.7	2124
21" x 30"	533 x 762	9	4.1	0.7	2130
21" x 36"	533 x 914	11	5.0	0.8	2136
21" x 42"	533 x 1067	12	5.5	1.1	2142
21" x 48"	533 x 1219	14	6.4	1.1	2148
21" x 54"	533 x 1372	16	7.3	1.3	2154
21" x 60"	533 x 1524	18	8.2	1.2	2160
21" x 72"	533 x 1829	24	10.9	1.4	2172
24" x 24"	610 x 610	9	4.1	0.8	2424
24" x 30"	610 x 762	11	5.0	0.8	2430
24" x 36"	610 x 914	13	5.9	0.8	2436
24" x 42"	610 x 1067	15	6.8	1.0	2442
24" x 48"	610 x 1219	16	7.3	1.2	2448
24" x 54"	610 x 1372	19	8.6	1.5	2454
24" x 60"	610 x 1524	21	9.5	1.5	2460
24" x 72"	610 x 1829	26	11.8	1.6	2472
30" x 36"	762 x 914	17	7.7	1.0	3036
30" x 48"	762 x 1219	20	9.1	1.5	3048
30" x 60"	762 x 1524	25	11.4	1.8	3060
30" x 72"	762 x 1829	30	13.6	2.3	3072
36" x 36"	914 x 914	21	9.5	1.3	3636
36" x 48"	914 x 1219	26	11.8	1.9	3648
36" x 60"	914 x 1524	34	15.4	2.3	3660
36" x 72"	914 x 1829	43	19.5	2.8	3672

**Stainless Steel finish—OUR BEST**


- **Stainless steel** — NSF-listed for all environments. Type 304 stainless steel. **15 Year Warranty**
- **Eaglegard<sup>®</sup> hybrid epoxy**
- **Zinc chloride**
- **Clear chromate**
- **MasterSeal<sup>®</sup> sealer**
- **Blue green hybrid epoxy** — NSF-listed for all environments. Zinc chloride plating followed by clear chromate plating with MasterSeal<sup>®</sup> sealer and a hybrid epoxy final coat. **15 Year Warranty**



**Chrome**


- **Bright nickel**
- **Chrome**

NSF-listed for dry storage and heated environments. Bright nickel plating followed by a mirror chrome plating. **1 Year Warranty** (NOTE: Optional clear hybrid epoxy, NSF-listed for all environments, is available.)



**Valu-Master<sup>®</sup> epoxy**


- **Phosphate conversion coating**
- **MasterSeal<sup>®</sup> sealer**
- **Pewter gray epoxy** — NSF-listed for dry/wet storage and dry heated environments. Phosphate conversion coating followed by metallic gray epoxy coating. **5 Year Warranty**



**Eaglebrite<sup>®</sup> zinc**

- **Zinc chloride**
- **Clear chromate**
- **MasterSeal<sup>®</sup> sealer**

NSF-listed for dry storage and heated environments. Bright zinc chloride plating followed by clear chromate plating with MasterSeal<sup>®</sup> sealer for improved rust protection. **3 Year Warranty** (NOTE: Wire shelves feature MasterSeal<sup>®</sup> sealer. Posts feature clear hybrid epoxy, NSF-listed for all environments.)



**PLASTIC SHELF MARKERS** — see spec sheet **1.03**

Snaps onto shelf edge. Provides easy identification of shelf contents or section. Holds 1" to 1 1/4" (25 to 32mm) high labels. Available in gray, black, or clear.

length		fits shelf size		gray	black	clear
in.	mm	in.	mm	model #	model #	model #
3"	76	all	all	A204331	A206216	A208746
13"	330	18"	457	A206196	A206217	A208747
19"	483	24"	610	A206197	A206218	A208749
25"	635	30"	762	A206198	A206219	A208750
31"	787	36"	914	A206199	A206220	A208751
43"	1092	48"	1219	A206200	A206221	A208752
55"	1397	60"	1524	A206201	A206222	A208753



clear plastic shelf marker

**RODS & TABS** — see spec sheet **1.04**

Used to enclose backs or sides of shelving units to prevent contents from falling. Also used to partition shelving units by positioning rods interior to shelves. Model number indicates height. Each rod comes with four tabs.

chrome model #	stainless steel model #
R54-C	R54-S
R63-C	R63-S
R74-C	R74-S
R86-C	R86-S



rod with tab in place

post

**POSTS** — see spec sheet **1.00** **1.01** **1.11** 

Posts are numbered on vertical 1" (25mm) increments to help ensure fast and level assembly. See page 27 in the MHC Price List 2001 for appropriate stem casters. Height includes leveling bolt and cap. Custom lengths available, apply price at next higher length plus a cutting charge of \$7.00 list per post. **EAGLEbrite**<sup>®</sup> posts are clear epoxy coated and can be used for walk-in coolers with **Valu-Master**<sup>®</sup> and **EAGLEgard**<sup>®</sup> shelving.

**FOR STATIONARY APPLICATIONS**

**FOR MOBILE APPLICATIONS**

height	weight	cubic	<b>EAGLEbrite</b> <sup>®</sup>	chrome	<b>EAGLEgard</b> <sup>®</sup>	stainless	<b>EAGLEbrite</b> <sup>®</sup>	chrome	<b>EAGLEgard</b> <sup>®</sup>	stainless		
in.	mm	lb.	kg	feet	model	model	model	model	model	model		
7"	178	1.0	0.5	0.1	P7-Z	P7-C	P7-E	P7-S	CP7-Z	CP7-C	CP7-E	CP7-S
14"	356	1.0	0.5	0.1	P14-Z	P14-C	P14-E	P14-S	CP14-Z	CP14-C	CP14-E	CP14-S
18"	457	1.5	0.7	0.1	P18-Z	P18-C	P18-E	P18-S	CP18-Z	CP18-C	CP18-E	CP18-S
33"	838	2.0	0.9	0.1	P33-Z	P33-C	P33-E	P33-S	CP33-Z	CP33-C	CP33-E	CP33-S
54"	1372	3.0	1.4	0.1	P54-Z	P54-C	P54-E	P54-S	CP54-Z	CP54-C	CP54-E	CP54-S
63"	1600	3.5	1.8	0.3	P63-Z	P63-C	P63-E	P63-S	CP63-Z	CP63-C	CP63-E	CP63-S
74"	1880	4.0	1.8	0.5	P74-Z	P74-C	P74-E	P74-S	CP74-Z	CP74-C	CP74-E	CP74-S
86"	2184	5.0	2.3	0.8	P86-Z	P86-C	P86-E	P86-S	CP86-Z	CP86-C	CP86-E	CP86-S

# SHELVING COMPONENTS/ACCESSORIES

## SOLID SHELVES — see spec sheet 1.01

Available in heavy gauge 304-type stainless or heavy gauge galvanized steel. Raised "V" edge on all sides and double hem bending provide quality and strength. Stainless collars are featured on both galvanized and stainless units.



### Packaging:

24" through 48" (610 through 1219mm) lengths are packed four to a box. 54" through 72" (1372 through 1829mm) lengths are packed two to a box. All items can be shipped UPS.



side view of solid shelf, showing raised "V" edge

width x length		weight		cubic feet	galvanized model #	stainless steel model #
in.	mm	lb.	kg			
14" x 24"	356 x 610	10	4.5	0.5	SS1424G	SS1424S
14" x 30"	356 x 762	12	5.5	0.5	SS1430G	SS1430S
14" x 36"	356 x 914	14	6.4	0.5	SS1436G	SS1436S
14" x 42"	356 x 1067	15	6.8	0.7	SS1442G	SS1442S
14" x 48"	356 x 1219	17	7.7	0.7	SS1448G	SS1448S
14" x 54"	356 x 1372	20	9.1	0.9	SS1454G	SS1454S
14" x 60"	356 x 1524	22	10.0	0.9	SS1460G	SS1460S
14" x 72"	356 x 1829	26	11.8	1.1	SS1472G	SS1472S
18" x 24"	457 x 610	11	5.0	0.7	SS1824G	SS1824S
18" x 30"	457 x 762	14	6.4	0.7	SS1830G	SS1830S
18" x 36"	457 x 914	16	7.3	0.7	SS1836G	SS1836S
18" x 42"	457 x 1067	18	8.2	0.9	SS1842G	SS1842S
18" x 48"	457 x 1219	20	9.1	0.9	SS1848G	SS1848S
18" x 54"	457 x 1372	22	10.0	1.2	SS1854G	SS1854S
18" x 60"	457 x 1524	24	10.9	1.2	SS1860G	SS1860S
18" x 72"	457 x 1829	28	12.7	1.3	SS1872G	SS1872S
21" x 24"	533 x 610	13	5.9	0.7	SS2124G	SS2124S
21" x 30"	533 x 762	15	6.8	0.7	SS2130G	SS2130S
21" x 36"	533 x 914	18	8.2	0.8	SS2136G	SS2136S
21" x 42"	533 x 1067	21	9.5	1.1	SS2142G	SS2142S
21" x 48"	533 x 1219	23	10.5	1.1	SS2148G	SS2148S
21" x 54"	533 x 1372	25	11.4	1.3	SS2154G	SS2154S
21" x 60"	533 x 1524	28	12.7	1.2	SS2160G	SS2160S
21" x 72"	533 x 1829	30	13.6	1.4	SS2172G	SS2172S
24" x 24"	610 x 610	15	6.8	0.8	SS2424G	SS2424S
24" x 30"	610 x 762	17	7.7	0.8	SS2430G	SS2430S
24" x 36"	610 x 914	19	8.6	0.8	SS2436G	SS2436S
24" x 42"	610 x 1067	23	10.5	1.0	SS2442G	SS2442S
24" x 48"	610 x 1219	24	10.9	1.2	SS2448G	SS2448S
24" x 54"	610 x 1372	27	12.3	1.5	SS2454G	SS2454S
24" x 60"	610 x 1524	31	14.1	1.5	SS2460G	SS2460S
24" x 72"	610 x 1829	33	15.0	1.6	SS2472G	SS2472S

## LEDGES — see spec sheet 1.04

Prevents contents from falling off unit. Ledges available for solid and wire shelving. Chrome or stainless steel.



4"-high (102mm) ledge for wire shelving

### FOR SOLID SHELVING

### FOR WIRE SHELVING

length		cu.		4"-HIGH (102mm) LEDGES				1"-HIGH (25mm) LEDGES				4"-HIGH (102mm) LEDGES			
in.	mm	ft.	lb.	kg	chrome model #	stainless steel model #	weight lb.	weight kg	chrome model #	stainless steel model #	weight lb.	weight kg	chrome model #	stainless steel model #	
14"	356	0.2	0.8	0.4	SL14-4C	SL14-4S	0.5	0.2	L14-1C	L14-1S	0.8	0.4	L14-4C	L14-4S	
18"	457	0.3	0.9	0.4	SL18-4C	SL18-4S	0.5	0.2	L18-1C	L18-1S	0.9	0.4	L18-4C	L18-4S	
21"	533	0.3	1.0	0.5	SL21-4C	SL21-4S	0.6	0.3	L21-1C	L21-1S	1.0	0.5	L21-4C	L21-4S	
24"	610	0.3	1.2	0.6	SL24-4C	SL24-4S	0.6	0.3	L24-1C	L24-1S	1.2	0.6	L24-4C	L24-4S	
30"	762	0.5	1.4	0.6	SL30-4C	SL30-4S	0.7	0.3	L30-1C	L30-1S	1.4	0.6	L30-4C	L30-4S	
36"	914	0.6	1.6	0.7	SL36-4C	SL36-4S	0.7	0.3	L36-1C	L36-1S	1.6	0.7	L36-4C	L36-4S	
42"	1067	0.6	1.8	0.8	SL42-4C	SL42-4S	0.8	0.4	L42-1C	L42-1S	1.8	0.8	L42-4C	L42-4S	
48"	1092	0.7	2.0	0.9	SL48-4C	SL48-4S	0.8	0.4	L48-1C	L48-1S	2.0	0.9	L48-4C	L48-4S	
54"	1372	0.8	2.2	1.0	SL54-4C	SL54-4S	0.9	0.4	L54-1C	L54-1S	2.2	1.0	L54-4C	L54-4S	
60"	1524	0.8	2.4	1.1	SL60-4C	SL60-4S	1.0	0.5	L60-1C	L60-1S	2.4	1.1	L60-4C	L60-4S	
72"	1829	1.0	2.6	1.2	SL72-4C	SL72-4S	1.1	0.5	L72-1C	L72-1S	2.6	1.2	L72-4C	L72-4S	

## DIVIDERS — see spec sheet 1.04

These 8"-high (203mm) dividers help keep shelf contents organized.


### FOR SOLID SHELVING

### FOR WIRE SHELVING

length		cubic feet	weight		chrome model #	stainless steel model #	weight		chrome model #	stainless steel model #
in.	mm		lb.	kg			lb.	kg		
14"	356	0.6	1.0	0.5	SSD14-C	SSD14-S	1.0	0.5	SD14-C	SD14-S
18"	457	0.6	1.3	0.6	SSD18-C	SSD18-S	1.3	0.6	SD18-C	SD18-S
21"	533	0.8	1.5	0.7	SSD21-C	SSD21-S	1.5	0.7	SD21-C	SD21-S
24"	610	1.0	1.8	0.8	SSD24-C	SSD24-S	1.8	0.8	SD24-C	SD24-S
30"	762	1.2	2.3	1.0	SSD30-C	SSD30-S	2.2	1.0	SD30-C	SD30-S
36"	914	1.4	3.0	1.4	SSD36-C	SSD36-S	2.7	1.2	SD36-C	SD36-S



divider for solid shelving

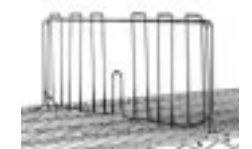

divider for wire shelving

shelf width x length inches	shelf width x length mm	weight lbs. kg	cu. ft.	caster type	wheel tread	EAGLEbrite® model #	chrome model #
18" x 36"	457 x 914	58 26.3	2.6	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC1836Z-S CC1836Z-SP CC1836Z-SB CC1836Z-SBP CC1836Z-SR CC1836Z-SRP	CC1836C-S CC1836C-SP CC1836C-SB CC1836C-SBP CC1836C-SR CC1836C-SRP
18" x 48"	457 x 1219	70 31.7	3.5	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC1848Z-S CC1848Z-SP CC1848Z-SB CC1848Z-SBP CC1848Z-SR CC1848Z-SRP	CC1848C-S CC1848C-SP CC1848C-SB CC1848C-SBP CC1848C-SR CC1848C-SRP
18" x 60"	457 x 1524	86 39.0	4.4	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC1860Z-S CC1860Z-SP CC1860Z-SB CC1860Z-SBP CC1860Z-SR CC1860Z-SRP	CC1860C-S CC1860C-SP CC1860C-SB CC1860C-SBP CC1860C-SR CC1860C-SRP
21" x 36"	533 x 914	67 30.4	3.0	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2136Z-S CC2136Z-SP CC2136Z-SB CC2136Z-SBP CC2136Z-SR CC2136Z-SRP	CC2136C-S CC2136C-SP CC2136C-SB CC2136C-SBP CC2136C-SR CC2136C-SRP
21" x 48"	533 x 1219	79 35.8	4.0	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2148Z-S CC2148Z-SP CC2148Z-SB CC2148Z-SBP CC2148Z-SR CC2148Z-SRP	CC2148C-S CC2148C-SP CC2148C-SB CC2148C-SBP CC2148C-SR CC2148C-SRP
21" x 60"	533 x 1524	96 43.5	5.0	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2160Z-S CC2160Z-SP CC2160Z-SB CC2160Z-SBP CC2160Z-SR CC2160Z-SRP	CC2160C-S CC2160C-SP CC2160C-SB CC2160C-SBP CC2160C-SR CC2160C-SRP
24" x 36"	610 x 914	74 33.5	3.5	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2436Z-S CC2436Z-SP CC2436Z-SB CC2436Z-SBP CC2436Z-SR CC2436Z-SRP	CC2436C-S CC2436C-SP CC2436C-SB CC2436C-SBP CC2436C-SR CC2436C-SRP
24" x 48"	610 x 1219	90 40.8	4.5	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2448Z-S CC2448Z-SP CC2448Z-SB CC2448Z-SBP CC2448Z-SR CC2448Z-SRP	CC2448C-S CC2448C-SP CC2448C-SB CC2448C-SBP CC2448C-SR CC2448C-SRP
24" x 60"	610 x 1524	110 49.9	5.6	swivel swivel swivel/brake swivel/brake swivel/rigid swivel/rigid	resilient poly resilient poly resilient poly	CC2460Z-S CC2460Z-SP CC2460Z-SB CC2460Z-SBP CC2460Z-SR CC2460Z-SRP	CC2460C-S CC2460C-SP CC2460C-SB CC2460C-SBP CC2460C-SR CC2460C-SRP

## STEM CASTER CARTS-

These sturdy, mobile 4-shelf carts, available in EAGLEbrite® zinc or chrome, consist of four 63" (1600mm) posts, four shelves, plastic split sleeves, donut bumpers and indicated 5" x 1 1/4" (127 x 32mm) casters. Fast assembly without the use of tools. Shipped knocked-down.

see spec sheet **1.07** **3.00M** 



stem caster cart



2-shelf medium duty utility cart

## UTILITY CARTS

A highly flexible and maneuverable transport product which can be configured with wire or solid shelves, or a combination of both. Handles are available in chrome plated steel and stainless steel. See page 26 in the MHC Price List 2001 for handles. Standard casters are resilient swivel in 4" (102mm) and 5" (127mm) diameter depending on cart size.

## MEDIUM DUTY – see spec sheet **1.10**

500 lb. (227kg) maximum cart capacity featuring resilient rubber casters; 18" (457mm)-wide carts have 4" (102mm) casters; 21" (533mm) and 24" (610mm) carts have 5" (127mm) casters.

### 2-SHELF UNIT

width x length in. mm	weight lbs. kg	cubic feet	EAGLEbrite® model #	chrome model
18" x 24" 457 x 610	32 14.5	2.5	EU2-1824Z	EU2-1824C
18" x 30" 457 x 762	35 15.8	2.5	EU2-1830Z	EU2-1830C
18" x 36" 457 x 914	38 17.2	2.5	EU2-1836Z	EU2-1836C
21" x 36" 533 x 914	42 19.1	2.9	EU2-2136Z	EU2-2136C
24" x 36" 610 x 914	45 20.4	2.9	EU2-2436Z	EU2-2436C

# SECURITY UNITS

## FULL-SIZE SECURITY UNITS – see spec sheet 1.22 NSF

Safely store and transport costly materials and items subject to pilferage. Offered in chrome, EAGLEgard® epoxy coating, or stainless steel coating. Stationary, mobile, and units with dolly trucks available.

### DOLLY TRUCK SECURITY UNITS

All dolly trucks are chrome and come standard with four swivel 5" x 1 1/4" (127 x 32mm) poly plate casters, two of which have brakes. See page 28 in the MHC Price List 2001 catalog for optional plate casters. 69" (1753mm) overall height.

width x length		weight		cubic feet	model #
in.	mm	lbs.	kg		
27 1/4"	39 3/4"	177	80.3	10.7	DTSC2436
27 1/4"	51 1/4"	214	97.1	18.5	DTSC2448
27 1/4"	61 1/4"	245	111.1	22.9	DTSC2460



mini security unit

## MINI SECURITY UNITS – see spec sheet 1.22 NSF

These chrome plated units are stationary and have an overall height of only 40" (1016mm).

width x length		weight		cubic feet	model #
in.	mm	lbs.	kg		
16"	38"	88	39.9	8.6	MSC1436
16"	50"	104	47.2	9.6	MSC1448
26"	38"	100	45.4	9.2	MSC2436
26"	50"	114	51.7	1.1	MSC2448

### MOBILE SECURITY UNITS

Mobile security units come standard with four swivel 5" x 1 1/4" (127 x 32mm) poly casters, two of which have brakes. 69" (1753mm) overall height. See page 27 in the MHC Price List 2001 for optional stem casters.

NOTE: On all stainless mobile security units, desired stem casters must be ordered separately.

width x length		weight		cu. ft.	chrome model #	EAGLEgard® model #	stainless steel model #
in.	mm	lbs.	kg				
27 1/4"	39 3/4"	170	77.1	9	CSC2436	CSC2436E	CSC2436S
27 1/4"	51 1/4"	193	87.5	13	CSC2448	CSC2448E	CSC2448S
27 1/4"	61 1/4"	212	96.2	15	CSC2460	CSC2460E	CSC2460S
33 3/4"	39 3/4"	212	96.2	13	CSC3036	CSC3036E	CSC3036S
33 3/4"	51 1/4"	235	106.6	15	CSC3048	CSC3048E	CSC3048S
33 3/4"	61 1/4"	245	111.1	18	CSC3060	CSC3060E	CSC3060S

### STATIONARY SECURITY UNITS

66" (1676mm) overall height.

width x length		weight		cu. ft.	chrome model #	EAGLEgard® model #	stainless steel model #
in.	mm	lbs.	kg				
17 1/4"	39 3/4"	88	39.9	5	SC1436	SC1436E	SC1436S
17 1/4"	51 1/4"	110	49.9	9	SC1448	SC1448E	SC1448S
17 1/4"	61 1/4"	129	58.5	10	SC1460	SC1460E	SC1460S
27 1/4"	39 3/4"	152	68.9	9	SC2436	SC2436E	SC2436S
27 1/4"	51 1/4"	175	79.4	13	SC2448	SC2448E	SC2448S
27 1/4"	61 1/4"	184	83.5	15	SC2460	SC2460E	SC2460S
33 3/4"	39 3/4"	182	82.6	13	SC3036	SC3036E	SC3036S
33 3/4"	51 1/4"	205	93.0	15	SC3048	SC3048E	SC3048S
33 3/4"	61 1/4"	215	97.6	18	SC3060	SC3060E	SC3060S

### OPTIONAL ADD-A-SHELF® ADJUSTABLE SHELVES

#### FOR FULL-SIZE SECURITY UNITS – see spec sheet 1.11

Patented. Special collar allows addition or removal of shelf without disassembling the entire unit. 400lb (181.4 kg) weight capacity per shelf. Chrome finish.

Note: Top and bottom shelves of unit must be standard shelves (above).

Use Add-A-Shelf® shelves for intermediate shelves.

width x length		weight		cubic feet	model #
in.	mm	lb.	kg		
14"	36"	8	3.6	0.5	A1436C
14"	48"	10	4.6	0.7	A1448C
24"	36"	13	5.9	0.8	A2436C
24"	48"	16	7.3	1.2	A2448C
24"	60"	21	9.5	1.5	A2460C

### OPTIONAL POSTS FOR FULL-SIZE SECURITY UNITS

height		weight		cubic feet	chrome model #	stainless steel model #
in.	mm	lbs.	kg			
74"	1880	4	1.8	0.8	SP74-CS	P74-SS
88"	2184	5	2.3	0.5	SP86-CS	SP86-SS



dolly truck security cart shown with optional center shelves



mobile security unit with optional center shelves shown



security unit with optional center shelves shown

## ANGLED SHELF CARTS

Ideal for small part pick and storage. Offers the ergonomic advantage of an angled shelf along with added visibility in the storage bins.

**Exclusive to Eagle!**

The EAGLE Advantage®:

- Flexibility to adjust shelves on 1" (25mm) vertical increments
  - Flexibility to adjust the slope of each shelf
  - Open-wire construction for high visibility of merchandise
  - Mobility to display merchandise in different areas with minimal rearrangement of fixtures
  - Durable chrome, VALU-MASTER®, or EAGLEbrite® shelves
  - Posts with clear epoxy finish
  - Units available in 3', 4', and 5' (914, 1219, and 1524mm) lengths
- Additional shelves and wire dividers available as options



angled shelf cart with optional shelf dividers

length in. mm	weight lbs. kg	caster description	cu. ft.	EAGLEbrite® model	chrome model	VALU-MASTER® model
36" 914	60 27.2	two swivel, 5" (127mm), polymer two brake, 5" (127mm), polymer	4	M1836Z-4	M1836C-4	M1836V-4
48" 1219	68 30.8	3" x 1 3/8" (76 x 21mm), 7/16" (11mm) tread	5	M1848Z-4	M1848C-4	M1848V-4
60" 1524	72 32.7	3" x 1 3/8" (76 x 21mm), 7/16" (11mm) tread	8	M1860Z-4	M1860C-4	M1860V-4

## BURN-IN CARTS

A simple testing and preparation station for electronic products. Also for transporting products to and from testing areas. Cart is 28" (711mm) wide, 64" (1626mm) long, and 69" (1753mm) high. Casters are poly swivel 5" (127mm)-diameter and include donut bumpers. Standard power harness is designed to be used on 4-shelf unit as shown.

item	weight		cubic feet	chrome model #	zinc model #
	lbs.	kg			
cart with power harness	114	51.7	6.0	BIC	BIC-Z

item	weight		cubic feet	model #
	lbs.	kg		
power harness	2	0.9	0.7	MHPH



burn-in cart

## ESD CART COVERS

Green. Made of thermoplastic and polyester fibers. Reinforced at all top corners. Furnished with brass zipper.

shelf width x length in. mm		post height in. mm		weight lbs. kg		cubic feet	model #
18" x 36"	457 x 914	54"	1372	3	1.4		
		63"	1600			CZ-63-1836-ESD	
18" x 48"	457 x 1219	54"	1372	4	1.8	2.5	CZ-54-1848-ESD
		63"	1600				CZ-63-1848-ESD
24" x 24"	610 x 610	54"	1372	3	1.4	2.5	CZ-54-2424-ESD
		63"	1600				CZ-63-2424-ESD
24" x 36"	610 x 914	54"	1372	3	1.4	2.5	CZ-54-2436-ESD
		63"	1600				CZ-63-2436-ESD
24" x 48"	610 x 1219	54"	1372	4	1.8	2.5	CZ-54-2448-ESD
		63"	1600				CZ-63-2448-ESD
24" x 60"	610 x 1524	54"	1372	5	2.3	2.5	CZ-54-2460-ESD
		63"	1600				CZ-63-2460-ESD



ESD cart cover in use

# MATERIAL HANDLING

## REEL SHELVING

The perfect solution to store and transport surface mount reels. Features **EAGLEbrite**® zinc plated finish with **MasterSeal**®, 9-gauge wire for the mat, and 6-gauge wire for the cradle and trusses. The R1836-7 has a ¾" (19mm) open space for each reel. The R1836-13 has a 2" (51mm) open space for each reel.

width x length		weight		cubic feet	capacity	model #
in.	mm	lbs.	kg			
18" x 36"	457 x 914	53	24.0	5.0	holds (78) 7"-diameter reels	R1836Z-7
18" x 36"	457 x 914	53	24.0	5.0	holds (30) 13"-diameter reels or 15"-diameter reels	R1836Z-13



reel shelf cart with both R1836Z-7 and R1836Z-13 shelves



roll bag dispenser

## ROLL BAG/SPOOL DISPENSERS

An effective means for dispensing rolls of bags, film or wire spools. An easy way to establish protocol by avoiding inadvertent mixing of non-compatible chemicals. Standard unit consists of three 14" x 48" (356 x 1219mm) wire shelves, eight removable dispensing bars and four 74" (1829mm) posts with 30" (762mm) outrigger feet for stability. Dispensing bars are adjustable on 1" (25mm) increments. Available in stainless steel or chrome finish. Custom sizes available.

width x length		weight		cu. ft.	chrome model #	stainless steel model #
in.	mm	lbs.	kg			
14" x 48"	356 x 1219	79	35.8	2.3	BD1448C	BD1448S

### OUTRIGGER BASE EXTENSIONS

front-to-back depth		weight		cu. ft.	chrome model #	stainless steel model #
in.	mm	lbs.	kg			
30"	762	4	1.8	0.5	C30-PBB	S30-PBB

## STENCIL SHELF UNIT

Zinc finish. One stencil shelf unit includes one bottom and top partitioned shelf. A quantity of one ST1836Z-13 is required for each tier desired. Each unit has (15) 2" (51mm) partitions. A stationary unit can be made conductive with the use of aluminum split sleeves and a mobile unit may be made conductive with the use of aluminum split sleeves and a drag chain. The stencil shelf may be used with any combination of posts and casters that best meets your requirements.

width x length		weight		cubic feet	capacity	model #
in.	mm	lbs.	kg			
18" x 36"	457 x 914	48	21.8	5.0	holds (15) stencils	ST1836Z-13

**ST1836Z-13 includes two shelves.**



stencil shelf unit

# BENCHSIDE TOTE BOX CARRIERS

# MATERIAL HANDLING

Variable shelf angle is ergonomically sensitive to repetitive pick-and-place activity. For static dissipation, add aluminum split sleeves and drag chain (see ESD accessories, page 79 in the MHC Price List 2001 catalog).


width x length in. mm	height in. mm	weight lbs. kg	cubic feet	caster type	model #
18" x 24" 457 x 610	(rear) 39" 991 (front) 30" 762	50 22.7	3.3	(2) 5" resilient swivel (2) 5" resilient w/brake	1824BTZ
18" x 36" 457 x 610	(rear) 39" 991 (front) 30" 762	55 24.9	4.5	(2) 5" resilient swivel (2) 5" resilient w/brake	1836BTZ
18" x 48" 457 x 610	(rear) 39" 991 (front) 30" 762	60 27.2	6.0	(2) 5" resilient swivel (2) 5" resilient w/brake	1848BTZ
18" x 60" 457 x 610	(rear) 39" 991 (front) 30" 762	65 29.5	7.5	(2) 5" resilient swivel (2) 5" resilient w/brake	1860BTZ




benchside tote box carrier

## TOTE BOX CARRIER- see spec sheet **7.01M**


The ideal way to transport totes, trays, and other containers. Comes standard with three sets of tote box slides. Each carrier comes with two brake and two swivel casters, resilient or polymer. 68" (1727mm) height on all models includes casters and 63" (1600mm) 16-gauge chrome-plated posts. 26" (660mm) length from front to back. Custom spacing available.



slide section dimensions

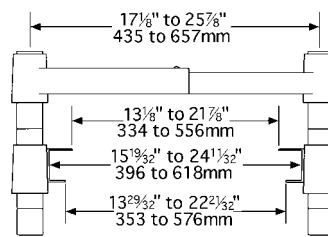

inside clearances of adjustable model

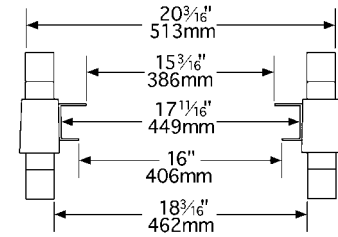

inside clearances of standard model




one-bay tote box carrier shown with optional additional tote boxes and slides

### ONE-BAY

Adjustable or standard. Comes with three single slide sets.

width x length in. mm	weight lbs. kg	cubic feet	caster type	description	model #
26" x 22 1/2" 660 x 575	55 24.9	3.5	resilient	1 section, non-adjustable	TBC1-R
	55 24.9	3.5	poly	1 section, non-adjustable	TBC1-P
26" x 20 1/2" to 26" x 29 1/2" 660 x 524 to 660 x 746	55 24.9	3.5	resilient	1 section, adjustable	TBC-R
	55 24.9	3.5	poly	1 section, adjustable	TBC-P

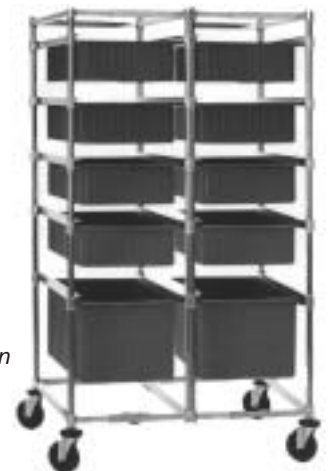

two-bay tote box carrier shown with optional additional tote boxes and slides

### TWO-BAY

Comes with three single slide sets and three double slides.

width x length in. mm	weight lbs. kg	cubic feet	caster type	description	model #
26" x 41 3/4" 660 x 1060	112 50.8	9	resilient	2 section, non-adjustable	TBC2-R
26" x 41 3/4" 660 x 1060	112 50.8	9	poly	2 section, non-adjustable	TBC2-P

### THREE-BAY

Comes with three single slide sets and six double slides.

width x length in. mm	weight lbs. kg	cubic feet	caster type	description	model #
26" x 60 1/2" 660 x 1546	168 76.2	12	resilient	3 section, non-adjustable	TBC3-R
26" x 60 1/2" 660 x 1546	168 76.2	12	poly	3 section, non-adjustable	TBC3-P



three-bay tote box carrier shown with optional additional tote boxes and slides

# ACCESSORIES

## ENCLOSURE PANELS — see spec sheet 1.04

Helps secure shelf contents, enclosing the backs and sides of unit. Available in chrome or stainless steel. Includes four retaining clamps.

shelf width in.	mm	panel width in.	mm	post height in.	mm	weight lb.	kg	cubic feet	chrome model	stainless model
18"	457	14"	356	54"	1372	6	2.7	1.5	E1854-C	E1854-S
18"	457	14"	356	63"	1600	7	3.2	1.8	E1863-C	E1863-S
18"	457	14"	356	74"	1880	8	3.6	2.0	E1874-C	E1874-S
24"	610	20"	233	54"	1372	9	4.1	2.1	E2454-C	E2454-S
24"	610	20"	233	63"	1600	10	4.5	2.3	E2463-C	E2463-S
24"	610	20"	233	74"	1880	11	5.0	2.6	E2474-C	E2474-S

Consult these tables for panel requirements:


### BACK PANELS

shelf length in.	mm	54" (1372mm) post ht.— panel(s) required	63" (1600mm) post ht.— panel(s) required	74" (1880mm) post ht.— panel(s) required
30"	762	(1) E2454	(1) E2463	(1) E2474
36"	914	(2) E1854	(2) E1863	(2) E1874
42"	1067	(1) E1854 (1) E2454	(1) E1863 (1) E2463	(1) E1874 (1) E2474
48"	1092	(2) E2454	(2) E2463	(2) E2474
54"	1372	(2) E1854 (1) E2454	(2) E1863 (1) E2463	(2) E1874 (1) E2474
60"	1524	(2) E2454 (1) E1854	(2) E2463 (1) E1863	(2) E2474 (1) E1874
72"	1829	(3) E2454	(3) E2463	(3) E2474

### END PANELS


shelf length in.	mm	54" (1372mm) post ht.— panel(s) required	63" (1600mm) post ht.— panel(s) required	74" (1880mm) post ht.— panel(s) required
18"	457	E1854	E1863	(1) E1874
21"	533	E1854	E1863	(1) E1874
24"	610	E2454	E2463	(1) E2474
30"	762	E2454	E2463	(1) E2474
36"	914	E1854	E1863	(1) E1874

enclosure panel

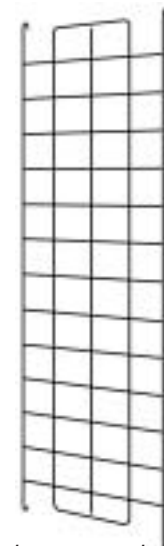

## CONDUCTIVE BINS AND DIVIDERS

Ultra-strong stackable containers are ideal for storage and transportation of electronic components and parts, assemblies, and loaded circuit boards. These containers are molded with a carbon-filled copolymer polypropylene material which protects sensitive electronic components from typical electromagnetic interference (EMI).

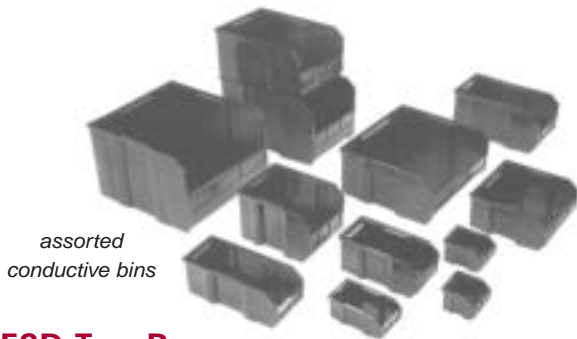

assorted  
conductive bins

overall dimensions width x length x height		weight*		cubic*	carton	bin	divider
in.	mm	lbs.	kg	feet	quantity	model #	model #
4½" x 4½" x 3"	105 x 114 x 76	0.5	0.2	0.7	48	A208336	A208348
4½" x 5½" x 3"	105 x 138 x 76	0.5	0.2	0.8	48	A208337	A208349
4½" x 7½" x 3"	105 x 191 x 76	0.5	0.2	1.0	48	A208338	A208350
5½" x 11" x 5"	138 x 279 x 127	0.5	0.2	0.6	12	A208339	A208351
5½" x 13½" x 5"	138 x 343 x 127	1.0	0.5	0.5	12	A208340	A208352
11" x 11" x 5"	279 x 279 x 127	1.5	0.7	0.5	8	A208341	A208353
8¼" x 11" x 7"	210 x 279 x 178	1.5	0.7	0.5	8	A208342	A208354
8¼" x 14¼" x 7"	210 x 375 x 178	1.5	0.7	1.1	8	A208343	A208355
16½" x 14¼" x 7"	419 x 375 x 178	3.0	1.4	1.8	6	A208344	A208356
11" x 16" x 8"	279 x 406 x 203	2.5	1.1	1.3	4	A208345	A208357
11" x 18" x 10"	279 x 457 x 254	2.8	1.2	1.7	4	A208346	A208358
16½" x 18" x 11"	419 x 457 x 279	4.0	1.8	2.6	4	A208347	A208359

## ESD TOTE BOXES

Fits standard tote box carriers (page 71 in the MHC Price List 2001). Containers can be divided into compartments by length and/or width. Dividers are on 1¼" (32mm) centers. Available in conductive XL or static dissipative LS material. To specify, add suffix XL or LS on to desired model. Example: TB1025XL.



assorted divider tote boxes

dimensions of outside top length x width x height		weight		cubic feet	max. divider slots				model #
in.	mm	lbs.	kg		long		short		
10.8" x 8.5" x 2.5"	274 x 216 x 64	0.5	0.2	0.2	5"	127	7"	178	TB1025
10.8" x 8.5" x 3.5"	274 x 216 x 89	0.7	0.3	0.2	5"	127	7"	178	TB1035
10.8" x 8.5" x 5.0"	274 x 216 x 127	0.9	0.4	0.3	5"	127	7"	178	TB1050
16.5" x 10.9" x 2.5"	419 x 277 x 64	1.0	0.5	0.3	7"	178	11"	279	TB2025
16.5" x 10.9" x 3.5"	419 x 277 x 89	1.2	0.5	0.4	7"	178	11"	279	TB2035
16.5" x 10.9" x 5.0"	419 x 277 x 127	1.4	0.6	0.5	7"	178	11"	279	TB2050
16.5" x 10.9" x 6.0"	419 x 277 x 152	1.6	0.7	0.6	7"	178	11"	279	TB2060
16.5" x 10.9" x 7.0"	419 x 277 x 178	1.8	0.9	0.7	7"	178	11"	279	TB2070
16.5" x 10.9" x 8.0"	419 x 277 x 203	2.0	0.9	0.8	7"	178	11"	279	TB2080
22.4" x 17.4" x 5.0"	567 x 442 x 127	2.8	1.3	1.1	11"	279	15"	381	TB3050
22.4" x 17.4" x 6.0"	567 x 442 x 152	3.5	1.6	1.3	11"	279	15"	381	TB3060
22.4" x 17.4" x 8.0"	567 x 442 x 203	4.1	1.9	1.8	11"	279	15"	381	TB3080
22.4" x 17.4" x 12.0"	567 x 442 x 305	6.0	2.7	1.7	11"	279	15"	381	TB3120

## STEM CASTERS — see spec sheet 1.05

Add mobility to your stationary unit. Use with posts and shelves. Donut bumpers included.

These casters cannot be used with Master Trak®. Decorative stem casters also available.

NOTE: Shelf width must be known when ordering rigid stem casters in order to ship appropriate channel frame to lock rigid casters.



polymer stem  
caster

### CONDUCTIVE

type	capacity		wheel diameter		wheel face		weight		cu. ft.	zinc model #
	lbs.	kg	in.	mm	in.	mm	lbs.	kg		
stem/swivel	200	91	5"	127	1 1/4"	32	2.5	1.2	0.1	CSS5-CC
stem/brake	200	91	5"	127	1 1/4"	32	2.8	1.3	0.1	CSB5-CC
* stem/rigid	200	91	5"	127	1 1/4"	32	3.5	1.6	0.1	CSR5-CC

\* Channel frames available.

### POLYMER

type	capacity		wheel diameter		wheel face		weight		cu. ft.	zinc model #	chrome model #	stainless steel model #
	lbs.	kg	in.	mm	in.	mm	lbs.	kg				
stem/swivel	300	136.1	5"	127	1 1/4"	32	2.5	1.2	0.1	CSS5P-300	CSS5PC-300	CSS5PS-300
stem/brake	300	136.1	5"	127	1 1/4"	32	2.8	1.3	0.1	CSB5P-300	CSB5PC-300	CSB5PS-300
* stem/rigid	300	136.1	5"	127	1 1/4"	32	3.5	1.6	0.1	CSR5P-300	CSR5PC-300	CSR5PS-300

\* Channel frames available.



resilient swivel  
stem caster

### RESILIENT

type	capacity		wheel diameter		wheel face		weight		cu. ft.	zinc model #	chrome model #	stainless steel model #
	lbs.	kg	in.	mm	in.	mm	lbs.	kg				
stem/swivel	125	56.7	4"	102	1"	25	1.1	0.5	0.1	CSS4-125	N/A	N/A
stem/swivel	125	56.7	5"	127	1"	25	2.0	0.9	0.1	CSS5-125	N/A	N/A
stem/swivel	200	90.7	5"	127	1 1/4"	32	2.5	1.2	0.1	CSS5-200	CSS5C-200	CSS5S-200
stem/brake	200	90.7	5"	127	1 1/4"	32	2.8	1.3	0.1	CSB5-200	CSB5C-200	CSB5S-200
* stem/rigid	200	90.7	5"	127	1 1/4"	32	3.5	1.6	0.1	CSR5-200	CSR5C-200	CSR5S-200

\* Channel frames available.

## VIBRATION DAMPENING CASTERS

Where vibration dampening is important, these unique 50A shore hardness "Softie™" casters reduce vibration transfer for work in process.

type	capacity		wheel diameter		wheel face		weight		cu. ft.	stainless steel model #	zinc model #	chrome model #
	lbs.	kg	in.	mm	in.	mm	lbs.	kg				
stem/swivel	180	81.6	5"	127	1 1/8"	35	2.0	0.9	0.1	SCSS5S-180	SCSS5-180	SCSS5C-180
stem/brake	180	81.6	5"	127	1 1/8"	35	2.5	1.1	0.1	SCSB5S-180	SCSB5-180	SCSB5C-180
* stem/rigid	180	81.6	5"	127	1 1/8"	35	2.8	1.3	0.1	SCSR5S-180	SCSR5-180	SCSR5C-180
stem/swivel	190	86.2	6"	152	1 1/8"	35	2.5	1.1	0.1	SCSS6S-190	SCSS6-190	SCSS6C-190
stem/brake	190	86.2	6"	152	1 1/8"	35	2.8	1.3	0.1	SCSB6S-190	SCSB6-190	SCSB6C-190
* stem/rigid	190	86.2	6"	152	1 1/8"	35	3.0	1.4	0.1	SCSR6S-190	SCSR6-190	SCSR6C-190

\* Channel frames available.



vibration dampening  
caster

# WORKSTATIONS/WORKTABLES

## adjustable® WITH CANTILEVERED OVERHEAD OR WIRE OVERSHELF

Eagle's adjustable® overhead system allows you to create work surfaces of your choice with single or multiple overshelves. Each work surface is combined with two (2) 33" (838mm) posts, two (2) 63" (1600mm) posts, and your choice of the following bases:

C-frame C-frame	H-frame H-frame	C-frame wire shelf	H-frame wire shelf
--------------------	--------------------	-----------------------	-----------------------

Base combination must be specified with your choice of work surface which is included in the table price. See page 68 in the MHC Price List 2001 for optional utility drawers available.

### PREFIXES

OAC – Brushed stainless top with chrome base.

OAS – Brushed stainless top with stainless base.

WOAC – Brushed stainless top with chrome base

WOAS – Brushed stainless top with stainless base

width x length		weight		cubic feet	model #
in.	mm	lb.	kg		
24" x 36"	610 x 914	55	24.9	4.4	2436T
24" x 48"	610 x 1219	67	30.4	5.7	2448T
24" x 60"	610 x 1524	109	49.4	7.0	2460T
30" x 36"	762 x 914	78	35.4	4.4	3036T
30" x 48"	762 x 1219	90	40.8	5.7	3048T
30" x 60"	762 x 1524	132	59.9	7.0	3060T
36" x 36"	914 x 914	101	45.8	5.0	3636T
36" x 48"	914 x 1219	113	51.3	7.0	3648T
36" x 60"	914 x 1524	155	70.3	9.0	3660T



Adjustable® with overhead cantilevered system shown with H-frame & wire under-shelf base, and optional bin holder, reel holder, and bench power center

## OPTIONS FOR adjustable® WITH CANTILEVERED OVERHEAD OR WIRE OVERSHELF SYSTEM



CANTILEVER SHELVES (sold separately)

in.	length		weight		cubic feet	chrome model #	stainless steel model #
	mm	lb.	kg				
36"	914	6	2.7	0.8	CS1236-C	CS1236-S	
48"	1219	8	3.6	1.0	CS1248-C	CS1248-S	
60"	1524	10	4.5	1.3	CS1260-C	CS1260-S	



WIRE SHELVES (sold separately)

in.	length		weight		cubic feet	chrome model #	stainless steel model #
	mm	lb.	kg				
36"	914	8	3.6	0.5	1436C	1436S	
48"	1219	10	4.6	0.7	1448C	1448S	
60"	1524	14	6.4	0.9	1460C	1460S	

### BIN HOLDERS

workstation length	weight		cu. ft.	bin capacity		model #	
	in.	mm		lbs.	kg		in.
36"	914	3.0	1.4	0.1	33"	838	BH36C
48"	1219	4.0	1.8	0.1	45"	1143	BH48C
60"	1524	4.5	2.0	0.3	57"	1448	BH60C

Chrome-plated bin holders allow you to sort, store and separate supplies. Accommodates supply and conductive bins. Constructed of 1 1/2" x 1/4" (41 x 13mm) 12-gauge mild steel, angle-welded to two conical collars for support. Shipped with two plastic split sleeves for attachment to posts.

### REEL HOLDERS

weight	cu. ft.	reel capacity		model #	
		lbs.	kg		in.
3.0	1.4	0.1	31"	787	RH36C
4.0	1.8	0.1	42"	1067	RH48C
4.5	2.0	0.3	54"	1372	RH60C

Chrome-plated reel holders allow you to sort and store wire and labels. Constructed of 1 1/4" x 1 1/4" x 3" (32 x 32 x 76mm) chrome-plated 14-gauge "C" channel, welded to a conical collar. Shipped with plastic split sleeves for attachment to posts. Rod is constructed of 3/8" (16mm)-diameter 16 gauge chrome-plated tubing. Tubing is held within rod holders with removable 1 1/2" (38mm)-long zinc-plated hairpin cotter clips.

### BENCH POWER CENTER

weight	cu. ft.	outlet capacity		model #
		lbs.	kg	
10	4.5	0.1	5	BPC36
15	6.8	0.1	7	BPC48
20	9.1	0.3	9	BPC60

UL-approved 115-volt, 20-amp power strip comes complete with mounting hardware and 6' (1829mm) cord. Cleat included to secure power cord when not in use.

### OPTIONAL LOW-VOLTAGE LIGHTING KITS — see spec sheet 10.09

Installs safely and conveniently. Simply connect to rear legs near the floor. The voltage is transferred up the legs to the light bar. The light bar energizes the 4.5" x 5" (114 x 127mm) lighting fixtures. No messy cords. No worry about shock since this system utilizes 12V and not 120V. Note: to be used in dry conditions only.



low-voltage lighting fixture

description	model #
low voltage kit, 3 lights, 36" (914mm)	LV36-S
low voltage kit, 3 lights, 48" (1219mm)	LV48-S
low voltage kit, 3 lights, 60" (1524mm)	LV60-S

**FLEX-MASTER<sup>®</sup> OVERSHELF SYSTEM** — see spec sheet **10.08** 

Create your own customized workstation design using standard components. Any table can be customized with overshelves of the same length. System can easily be changed or expanded as needed. Tables are caster-capable for workstation mobility. Overshelves' height adjustable in 1" (25mm) increments for flexible and accurate placement. 10" & 12" (254 & 305mm) shelf widths can be intermixed on same posts. Features split sleeve and tapered collar for easy assembly. Overshelves shipped knocked-down. All shipping weights and cubic feet are approximate.



**OVERSHELVES**

Available in widths of 10" and 12" (254 and 305mm). 14 gauge, type 304 shelves available upon request. Freight class is 70.0.

width x length		weight		cubic feet	16/430 model #	16/304 model #
in.	mm	lbs.	kg			
10" x 30"	254 x 762	10.1	4.6	0.5	411030	421030
10" x 36"	254 x 915	12.1	5.5	0.6	411036	421036
10" x 48"	254 x 1219	13.1	6.0	0.8	411048	421048
10" x 60"	254 x 1524	15.2	6.9	1.0	411060	421060
10" x 72"	254 x 1829	17.2	7.8	1.2	411072	421072
10" x 84"	254 x 2133	19.3	8.8	1.5	411084	421084
10" x 96"	254 x 2438	21.3	9.7	1.7	411096	421096
10" x 108"	254 x 2743	23.4	10.6	1.9	411010	421010
10" x 120"	254 x 3048	25.4	11.5	2.1	411012	421012
10" x 132"	254 x 3353	27.4	12.5	2.3	411013	421013
10" x 144"	254 x 3658	29.4	13.4	2.5	411014	42101
12" x 30"	305 x 762	11.1	5.1	0.6	411230	421230
12" x 36"	305 x 915	12.3	5.6	0.8	411236	421236
12" x 48"	305 x 1219	14.8	6.7	1.0	411248	421248
12" x 60"	305 x 1524	17.2	7.8	1.3	411260	421260
12" x 72"	305 x 1829	19.7	9.1	1.5	411272	421272
12" x 84"	305 x 2133	22.1	10.0	1.8	411284	421284
12" x 96"	305 x 2438	24.6	11.2	2.0	411296	421296
12" x 108"	305 x 2743	27.0	12.3	2.3	411210	421210
12" x 120"	305 x 3048	29.5	13.4	2.5	411212	421212
12" x 132"	305 x 3353	31.5	14.3	2.7	411213	421213
12" x 144"	305 x 3658	33.5	15.2	2.9	411214	421214

**POSTS**

Sold in pairs. Order 2 pairs for 30" to 72" (762 to 1829mm) shelves. Order 3 pairs for 84" to 144" (2134 to 3658mm) shelves. Freight class is 50.0.

height		weight		cubic feet	chrome model #	stainless steel model #
in.	mm	lbs.	kg			
18"	457	1.7	0.8	0.1	418202	418002
30"	762	2.4	1.1	0.2	430202	430002
48"	1219	5.6	2.5	0.2	448202	448002

**UTILITY RACKS**

Chrome plated. Freight class is 50.0.

length		weight		cubic feet	model #	length		weight		cubic feet	model #
in.	mm	lbs.	kg			in.	mm	lbs.	kg		
30"	762	1.7	0.8	0.2	PRT30-C	84"	2133	4.1	1.9	0.4	*PRT84-C
36"	915	1.9	0.9	0.2	PRT36-C	96"	2438	4.9	2.2	0.4	*PRT96-C
48"	1219	2.1	1.0	0.2	PRT48-C	108"	2743	5.6	2.5	0.5	*PRT108-C
60"	1524	2.5	1.1	0.3	PRT60-C	120"	3048	6.2	2.8	0.5	*PRT120-C
72"	1829	2.9	1.3	0.4	PRT72-C	132"	3353	6.9	3.1	0.6	*PRT132-C
						144"	3658	7.6	3.5	0.6	*PRT144-C

\*utility racks come in 2 pieces.