

NEXUS SYSTEM FRAMES

Building your ideal Nexus accessory system is an easy process. Simply select the frames (starters and adders) that fit your worksurface width, then pick accessories of corresponding widths to mount on the frames. Accessories are easily moved and repositioned as your needs change.



Nexus Surface-Mount Frames

Frames are sturdy, heavy gauge steel, and are notched front and back at 1" increments for mounting accessories. Starter frames consist of 2 upright posts and a horizontal rail. Adder sets consist of an additional upright and horizontal rail. Uprights are available in heights of 30" and 48", and 6 widths. Foot plate is 2 3/4" x 4". Specify color from chart on inside back cover.

30" High Surface-Mount Frames SEC. WIDTH CENT.-TO-CENT


Startor cot

Starter set		
NXF/SM2430	24"	
NXF/SM3030	30"	
NXF/SM3630	36"	
NXF/SM4230	42"	
NXF/SM4830	48"	
NXF/SM6030	60"	
Adder set		
NXF/SM2430A	24"	
NXF/SM3030A	30"	
NXF/SM3630A	36"	
NXF/SM4230A	42"	
NXF/SM4830A	48"	
NXF/SM6030A	60"	

48" High Surface-Mount Frames

PART NO.	SEC. WIDTH CENTTO-CENT.
Starter set	
NXF/SM2448	24"
NXF/SM3048	30"
NXF/SM3648	36"
NXF/SM4248	42"
NXF/SM4848	48"
NXF/SM6048	60"
Adder set	
NXF/SM2448A	24"
NXF/SM3048A	30"
NXF/SM3648A	36"
NXF/SM4248A	42"
NXF/SM4848A	48"
NXF/SM6048A	60"

For rear-mount Nexus systems for Align® Adjustable Height Workstations, see page 229.

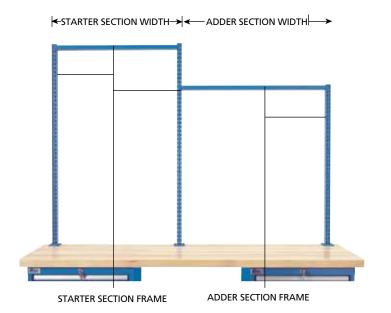

Available Widths of Nexus Systems

The widths below represent measurements from frame center to frame center. Uprights are 1 3/16" wide. Uprights must be mounted a minimum of 3" from edge of worksurface.

	-	_		
Usina	1	S	cti	n
OSILIG		20	·ч	vı

SECTION WIDTH (CENTER)	OVERALL WIDTH (FOOT-TO-FOOT)	MINIMUM WORK- SURFACE LENGTH	INSIDE USEABLE WIDTH
24"	26 ¾"	30"	22 3/4"
30"	32 ³ /4"	36"	28 3/4"
36"	38 ³ ⁄4"	42"	34 ³ ⁄4"
42"	44 3/4"	48"	40 ¾"
48"	50 ³ /4"	54"	46 ³ ⁄4"
60"	62 ³ ⁄4"	66"	58 ³ ⁄4"

Using 1 Starter and 1 Adder Section SECTION WIDTH OVERALL WIDTH MINIMUM WORKSURFACE LENGTH

(CENTER-TO-CENTER)	(FOOT-TO-FOOT)	WINNING WORKSON ACE LENGTH
24" + 24"	50 3/4"	54"
24" + 30"	56 ¾"	60"
24" + 36"	62 3/4"	66"
24" + 42"	68 ³ ⁄4"	72"
24" + 48"	74 ¾"	78"
24" + 60"	86 ³ /4"	90"
30" + 30"	62 3/4"	66"
30" + 36"	68 ¾"	72"
30" + 42"	74 ¾"	78"
30" + 48"	80 ¾"	84"
30" + 60"	92 ¾"	96"
36" + 36"	74 ³ ⁄4"	78"
36" + 42"	80 3/4"	84"
36" + 48"	86 ¾"	90"
36" + 60"	98 3/4"	102"
42" + 42"	86 ³ /4"	90"
42" + 48"	92 ¾"	96"
42" + 60"	104 ¾"	108"
48" + 48"	98 3/4"	102"
48" + 60"	110 ¾"	114"
60" + 60"	122 3/4"	126"



NEXUS SYSTEM SHELVES

Shelves must match the width of your chosen section frame (see previous page).

Specify color from chart on inside back cover.

Adjustable Shelves

Adjustable, heavy gauge steel shelves can be mounted parallel to the worksurface or at a 15° angle for easy, ergonomic access. They have a 100 lb. weight capacity for evenly distributed loads. Shelves are reversible, with the lip either at the front, or at the rear to act as a back stop. Supports are attached through a simple double-notch system into slots on the uprights.



Adjustable Shelves

PART NO.	SHELF WIDTH	SEC. WIDTH
12" deep		
NXS/A2412L	23 1/2"	24"
NXS/A3012L	29 1/2"	30"
NXS/A3612L	35 1/2"	36"
NXS/A4212L	41 ½"	42"
NXS/A4812L	47 ½"	48"
NXS/A6012L	59 1/2"	60"

15" deep NXS/A2415L 23 ½" 24" NXS/A3015L 29 ½" 30" NXS/A3615L 35 ½" 36" NXS/A4215L 41 1/2" 42" NXS/A4815L 47 ½" 48" NXS/A6015L 59 ½" 60'

Shelf Dividers

Steel dividers fit over the edge of adjustable shelf when shelf is mounted at 0°. Base of divider can be ordered left or right of divider upright. Painted to match shelf.



Shelf Dividers HFIGHT

For 12" deep adjustable shelves		
NXS/MD100-12/L	4"	
NXS/MD100-12/R	4"	
NXS/MD150-12/L	6"	
NXS/MD150-12/R	6"	
NXS/MD200-12/L	8″	
NXS/MD200-12/R	8″	

For 15" deen adjustable shelves

i oi i s accp aajastak	ic silcives	
NXS/MD100-15/L	4"	
NXS/MD100-15/R	4"	
NXS/MD150-15/L	6"	
NXS/MD150-15/R	6"	
NXS/MD200-15/L	8"	
NXS/MD200-15/R	8"	

Variable Angle Shelves

Shelf adjusts into five positive postions from totally flat to a 25° angle and has a capacity of 150 lbs. for evenly distributed loads. Can be mounted in a forward or set-back position between uprights for maximum flexibility.



Variable Angle Shelves PART NO.

ro deep		
NXS/V2418L	22 1/2"	24"
NXS/V3018L	28 1/2"	30"
NXS/V3618L	34 1/2"	36"
NXS/V4218L	40 1/2"	42"
NXS/V4818L	46 ½"	48"
NXS/V6018L	58 1/2"	60"
·		

исср		
S/V2424L	22 1/2"	24"
S/V3024L	28 1/2"	30"
S/V3624L	34 1/2"	36"
S/V4224L	40 1/2"	42"
S/V4824L	46 1/2"	48"
		12



Eustom Products & Services Inc.

6286 Claude Way E., Inver Grove Heights Mn, 55076 PH: 888-444-1202 (Toll Free) or 651-452-0113 Fax: 651-452-2264 E-MAIL: Info@custom-products.com Website: www.custom-products.com

"YOUR SOURCE FOR WORKPLACE SOLUTIONS"

LISTA



WORKBENCHES

NEXUS SYSTEM LIGHTING ACCESSORIES

Overhead Light Fixtures

- Fluorescent fixture is available in 2-bulb or 4-bulb model in 44" or 56" length.
- Tilts up or down 10°.
- Brackets allow light fixture to be mounted to frame sections 30" to 90" wide.
- Kit includes switch and 8' grounded electrical cord, support track, standard acrylic diffuser and T8 bulbs. Requires NX/OHL-TR/BRK support brackets (see right).
- Fixture available in Light Gray only, but brackets can be ordered in any Lista color (see back cover for color chart).
- Bracket with fixture can also simultaneously support tool rail (see next page).



Overhead Light Fixture Kits

2-bulb		
NX/OHL-R48/2	44"	30"-48"
NX/OHL-R60/2	56"	49"-60"
NX/OHL-R72/2	56"	61"-72"
NX/OHL-R78/2	56"	73"-78"
NX/OHL-R84/2	56"	79"-84"
NX/OHL-R90/2	56"	85"-90"

4-bulb		
NX/OHL-R48/4	44"	30"-48"
NX/OHL-R60/4	56"	49"-60"
NX/OHL-R72/4	56"	61"-72"
NX/OHL-R78/4	56"	73"-78"
NX/OHL-R84/4	56"	79"-84"
NX/OHL-R90/4	56"	85"-90"

Overhead L	ight Fixtu BULBS	Ires Only WIDTH
NX/OHL44/2	2	44"
NX/OHL44/4	4	44"
NX/OHL56/2	2	56"
NX/OHL56/4	4	56"

Overhead Light and Tool Rail Support Brackets

Required for mounting overhead light fixture. Brackets come in pairs. Specify color (see inside back cover for color chart). See next page for tool rail options.

- 24" deep brackets can be used with a 24" deep worksurface (either surface- or rear-mount* Nexus frames), or a 30" deep worksurface with surface-mount frames.
- 30" deep brackets can be used with a 30" deep worksurface with rear-mount frames, or a 36" deep worksurface (either surface- or rear- mount frames).



Overhead Light and Tool Rail Support Brackets

PART NO.	BRACKET DEPTE
NX/OHL-TR/BRK24	24"
NX/OHL-TR/BRK30	30"

^{*}rear-mount frames only available with Align® adjustable height bases

Undershelf Task Lights

PART NO.	SIZE	BULB
FLF-18	18" W x 5" D x 1 3/4" H	F15T8
FLF-36/UCF	36" W x 5" D x 1 ³ / ₄ " H	F25T8
FLF-48/UCF	48" W x 5" D x 1 ¾" H	F32T8

NEXUS SYSTEM TOOL RAILS AND POWER OPTIONS

Tool Rails

The tool rail spans the length of the worksurface. It is available in 48", 60" or 72" lengths. Each tool rail has a 30 lb. capacity, and comes complete with a trolley, 2 hangers, 2 endstops and 2 end caps in black finish. Balancer not included. Requires support brackets (see previous page). Fixture and bracket can also simultaneously support overhead light (see previous page). Color is black.

Swing Arm Tool Rail

The swing arm tool rail is 36" in length and swings 180°. It has a 30 lb. capacity and includes a trolley, 1 endstop and 1 end cap. Includes mounting bracket. Balancer not included. Color is black.

Single Uprights

Economical solution to mounting power or articulating component above the surface. Capacity 60 lbs.



Airhose Attachment

Small bracket attaches to frame upright. Quick-connect fitting not supplied.



Vertical Power Strips

Mounts vertically to front and back of upright. Bracket and hardware supplied. Lighted on/off switch, 6' cord with grounded plug and circuit breaker are included. Fixture and brackets are black.



Tool Rails LENGTH TR48 48" TR60 60" TR72 72"

Swing Arm T	Tool Rail	
SWT36	36"	

Single Uprights		
PART NO.	HEIGHT	
NXF-P30/SM	30"	
NXF-P48/SM	48"	

Airhose Attachment NX/AHB bracket for air supply

Vertical Power Strips NXVPS/15 15 amp with 6 outlets 20 amp with 6 outlets NXVPS/20 NXVPS/15GF 15 amp GFCI with 6 outlets NXVPS/20GF 20 amp GFCI with 6 outlets

Horizontal Power Rails


PART NO.	
15 amp	20 amp
NXHPS/24-15	NXHPS/24-20
NXHPS/30-15	NXHPS/30-20
NXHPS/36-15	NXHPS/36-20
NXHPS/42-15	NXHPS/42-20
NXHPS/48-15	NXHPS/48-20
NXHPS/60-15	NXHPS/60-20

15 amp GFCI	20 amp GFCI
NXHPS/24-15GF	NXHPS/24-20GF
NXHPS/30-15GF	NXHPS/30-20GF
NXHPS/36-15GF	NXHPS/36-20GF
NXHPS/42-15GF	NXHPS/42-20GF
NXHPS/48-15GF	NXHPS/48-20GF
NXHPS/60-15GF	NXHPS/60-20GF

For items with choice of color, specify color from chart on inside back cover.

Horizontal Power Rails

Self-contained, 6-plug electrical outlet strip. Power rail pivots on axis, providing full horizontal adjustability. 110V, 15 amp or 20 amp circuit breaker.



LISTA



NEXUS SYSTEM PIVOTING ACCESSORIES

Articulating arms allow free and simple repositioning of a wide range of Nexus System accessories. Arm swings 180° for easy ergonomic access, and has a 75 lb. capacity. All accessories include arm and mounting bracket (mounting brackets are black). Specify color from chart on inside back cover.



Holds computer monitor. Includes retractable wire keyboard holder. 75 lb. capacity. 12 $\frac{3}{8}$ " wide x 12 $\frac{3}{8}$ " deep.

Optional Mouse Tray

Mouse tray attaches to monitor shelf with keyboard holder (above) to hold computer mouse and/or mouse pad. 75 lb. capacity. 9 1/2" wide x 7 5/8" deep. Ordered separately.

Equipment Shelf

Holds a variety of customer-supplied equipment or tools. 75 lb. capacity. $12 \frac{3}{8}$ " wide x $12 \frac{3}{8}$ " deep.

Accessory Shelf

For easy access to small tools, instruments, parts, etc. Ribbed mat optional. 21 1/4" wide x 7 3/8" deep. 75 lb. capacity.

Document Holder

For displaying papers, plans, etc. 11 %" wide x 13 3/4" high. Includes lip for pencils, pens, etc.

Large Document Holder

For displaying large documents, and open binders and books. 23 %" wide x 13 %" high. Includes lip for pencils, pens, etc.

Bin Container

Holds 3 rows of plastic bins for easy access to parts and components. Interior space per shelf is 20" wide x 6" deep. Top shelf is 3 1/4" high, second and third shelves are 3 3/4" high. Requires accessory shelf (left) for support (not included), or can be used freestanding. 50 lb. capacity. Does not include bin boxes.

Additional Monitor Arms can be found on pages 218-221.















Monitor Shelf with Keyboard Holder

NXA/MS-KB

Optional Mouse Tray

NX/MP

Equipment Shelf PART NO.

NXA/ES

Accessory Shelf

NXA/AS shelf NX/AS-MAT ribbed rubber mat

Document Holder

NXA/DH

Large Doucment Holder PART NO.

NXA/DHW

Bin Container

NX/AS-BC

NEXUS SYSTEM BACK PANELS AND MARKERBOARD/ **TACKBOARDS**

Sturdy panels easily attach between frame uprights. All panels are available in heights of 18" and 30".

Reversible markerboard/tackboard attaches using same brackets (available in 30" height only).


Specify color from chart on inside back cover.

Louvered Back Panels

Steel louvered panel is designed to accommodate industry-standard plastic boxes that feature louvered edge or lip.

Pegboard Panels

Steel pegboard panel accepts all standard pegging devices (i.e. hooks, etc.). Pegboard holes are 1/4" in diameter. Ideal for placement of commonly used tools.



Solid Privacy Panels

Steel privacy panel encloses a section and can also be used to hold/display items with magnets.



Reversible Markerboard/Tackboards

Two-sided reversible board. Features white magnetic markerboard on one-side and gray fabric tackboard on the other. Also functions as privacy panel and sound dampener. 30" high.



Louvered Back Panels 18" high NXLP/2418 24" NXLP/3018 30" NXLP/3618 36" NXLP/4218 42" NXLP/4818 48" NXLP/6018 60" 30" high NXLP/2430 24" NXLP/3030 30" NXLP/3630 36" NXLP/4230 42" NXLP/4830 48"

NXLP/6030 60"

NXPP/6030 60"

Pegboard Panels PART NO. USE WITH **USE WITH SECTION WIDTH** 18" high NXPP/2418 24" NXPP/3018 30" NXPP/3618 36" NXPP/4218 42" NXPP/4818 48" NXPP/6018 30" high 24" NXPP/2430 NXPP/3030 30" 36" NXPP/3630 NXPP/4230 42" NXPP/4830 48"

Solid Priv PART NO.	acy Panels USE WITH SECTION WIDTH
18" high	
NXSP/2418	24"
NXSP/3018	30"
NXSP/3618	36"
NXSP/4218	42"
NXSP/4818	48"
NXSP/6018	60"
30" high	
NXSP/2430	24"
NXSP/3030	30"
NXSP/3630	36"
NXSP/4230	42"
NXSP/4830	48"
NXSP/6030	60"

Reversible Markerboard/ Tackboards

PART NO.	USE WITH SECTION WIDTH
NXRMT/2430	24"
NXRMT/3030	30"
NXRMT/3630	36"
NXRMT/4230	42"
NXRMT/4830	48"

WORKBENCHES: Nexus Overhead Cabinets





WORKBENCHES

OVERHEAD CABINETS

Ideal companion to Lista's modular storage cabinets or workstations, overhead cabinets bring organization to the storage of binders, bulk storage or any items that require constant access, ample room and safe secure storage.

Overhead cabinets are 15" deep and available in three heights (16", 20" & 29") and widths to match drawer cabinets, Nexus frames and workbench risers. Overhead cabinets can also be in numerous ways. Mounted onto Riser shelves, Rear mount frame system for caibnets, with wall mounting brakcets, onto Nexus uprights, to the side of a cabinet or directly to wall. All mounting systems must be ordered seperately.

Overhead cabinets are available with no door, retractable door, hinged or sliding door options. Many doors have available window options. See chart for available door options based on overhead cabinet width and height. Retractable doors open into the cabinet and require 1" of vertical space. Hinged doors come in a set of two doors and are hinged at the edges of the cabinet, they have an inside panel to give a clean appearance and eliminated areas for debris to collect. Sliding doors bypass each other and give to one half of the cabinet at a time.

All overhead cabinets come standard with one bottom shelf. 29" cabients come with the addition of one adjustable shelf that is adjustable at 1 ½" increments and shelves have a usable depth of 13 ½". Additional adjustable shelves can be ordered seperately.

Multiple locking options are available as well including individual, keyed alike and master keying.

Canopy tops are available to prevent the top of the cabinet from being used for storage.

How to order a overhead cabinet

1. Select overhead cabinet based on your choice of dimensions.

2. Select door type.

ND = no door

Door for 16" high overhead cabinets

RD = retractable door

Doors for 29" high overhead cabinets

HD = hinged doors

HDP* = hinged doors with steel-framed plexiglas

SD = sliding doors

SDP** = sliding doors with steel-framed plexiglas

*plexiglas doors available for cabinets 30" and wider only

**plexiglas doors available for cabinets 42" and wider only

3. Select lock type.

RG = individual **KA** = keyed-alike

MA = master

4. □ **Select paint color** (see inside back cover for color chart).

5. Order mounting brackets.

EXAMPLE: to order an OHC2416 overhead cabinet with a retractable door, an individual lock, and Bright Blue paint, the cabinet part number would be **OHC2416-RDRGBB**, and the mounting

brackets would be **NX/OHC-BRK16**.



16" OVERHEADS PART NO.	DOOR OPTION RETRACTABLE
OHC1716 ■■□	✓.
OHC2316 ■■□	✓
OHC2416 ■■□	√
OHC2816 ■■□	✓
OHC3016 ■■□	✓
OHC3416 ■■□	√
OHC34.2516 ■■□	✓
OHC3616 ■■□	✓.
OHC4016 ■■□	√
OHC4216 ■■□	✓
OHC4516 ■■□	✓.
OHC4716 ■■□	√
OHC4816 ■■□	✓
OHC5616 ■■□	✓
OHC6016 ■■□	✓

20" OVERHEADS PART NO.	DOOR OPTION RETRACTABLE		SLIDING
OHC1720 ■■□	\checkmark	\checkmark	
OHC2320	√	\checkmark	
OHC2420	√	√	
OHC2820 ■■□	√	√	
OHC3020	√	\checkmark	
OHC3420	√	√	
OHC34.2520] 🗸	√	
OHC3620 ■■□	√	\checkmark	
OHC4020	√	√	√
OHC4220	√	√	√
OHC4520	√	$\overline{}$	\checkmark
OHC4720 📕 🗌	√	√	√
OHC4820	√	√	√
OHC5620	\checkmark	\checkmark	\checkmark

29" OVERHEADS PART NO.	DOOR OPT HINGED	TONS SLIDING
OHC 1729 ■■□	\checkmark	
OHC2329 ■■□	√	
OHC2429 ■■□	✓	
OHC2829	√	
OHC3029 ■■□	√	
OHC3429	√	
OHC34.2529	✓	
OHC3629 ■■□	√	
OHC4029 ■■□	✓	√
OHC4229	√	√
OHC4529 ■■□	√	√
OHC4729	√	√
OHC4829 ■■□	√	√
OHC5629 ■■□	\checkmark	√

Overhead Cabinet dimensions and extra shelf part numbers.

OHC MODEL OHC 17	WIDTH IN. 16.85	WIDTH MM'S 428.0	TO MATCH NS, NW	EXTRA SHELVES PART NO. OHC-S17
OHC23	22.20	564.0	CL, MP	OHC-S23
OHC24_	24.00	609.6	24"	OHC-S24
OHC28_	28.23	717.0	ST, SC	OHC-S28
OHC30	30.00	762.0	30"	OHC-S30
OHC34	33.70	856.0	2 x NS, NW	OHC-S34
OHC34.25	34.25	870.0	ES, EW	OHC-S34.25
OHC36	36.00	914.4	36"	OHC-S36
OHC40	40.28	1023.0	HS, HW	OHC-S40
OHC42	42.00	1066.8	42"	OHC-S42
OHC45	44.96	1142.0	ML, MI	OHC-S45
OHC47	46.97	1193.0	MS, MW	OHC-S47
OHC48	48.00	1219.2	48"	OHC-S48
OHC56	56.34	1431.0	HT, DW	OHC-S56
OHC60	60.00	1524.0	60"	OHC-S60







WORKBENCHES: Nexus Overhead Cabinets




OVERHEAD CABINETS (CONT)

Lista overhead cabinets can be mounted to a wall for stability and permanence. Mount either directly to the wall with customer-supplied hardware, or by using a Wall Mounting Kit.

Overhead cabinets can also be easily mounted atop an OHC stationary riser shelf for convenient support without having to mount the unit to the wall. Stationary riser shelves are available either with or without a back panel, and can be situated above any counter top.

Wall Mounting Kits

Brackets for mounting overhead cabinets to wall. Starter kit is required for first cabinet in row. One adder kit is required for each additional cabinet used. Starter kit includes brackets and end filler strips; adder kit includes brackets only. Color to match housing.



20" High Cal	oinet Wall Mo ADDER PART NO.	unting Kits USE WITH CAB. WIDTH
OHC-WB2320	OHC-WB23A	22 3/16"
OHC-WB2820	OHC-WB28A	28 1/4"
OHC-WB3020	OHC-WB30A	30"
OHC-WB3420	OHC-WB34A	33 ¾"
OHC-WB3620	OHC-WB36A	36"
OHC-WB4020	OHC-WB40A	40 1/4"
OHC-WB4220	OHC-WB42A	42"
OHC-WB4720	OHC-WB47A	47"
OHC-WB4820	OHC-WB48A	48"
OHC-WB5620	OHC-WB56A	56 ½"

29" High Cal STARTER PART NO.	binet Wall Mo ADDER PART NO.	unting Kits USE WITH CAB. WIDTH
OHC-WB2329	OHC-WB23A	22 ³/16"
OHC-WB2829	OHC-WB28A	28 1/4"
OHC-WB3029	OHC-WB30A	30"
OHC-WB3429	OHC-WB34A	33 ¾"
OHC-WB3629	OHC-WB36A	36"
OHC-WB4029	OHC-WB40A	40 1/4"
 OHC-WB4229	OHC-WB42A	42"
OHC-WB4729	OHC-WB47A	47"
OHC-WB4829	OHC-WB48A	48"
OHC-WB5629	OHC-WB56A	56 ½"

OHC Riser Shelves

Overhead cabinets can also be easily mounted atop an OHC stationary riser shelf for convenient support without having to mount the unit to the wall. Stationary riser shelves are available either with or without a back panel, and can be situated above any counter top.



OHC Riser Shelves				
WIDTH	W/BACKSTOP	W/BACKSTOP STAINLESS STEEL	W/BACKSTOP & PEGBOARD	W/BACKSTOP & LOUVERED
48"	SRS/OHC48-2-15DX12C	SRS/OHC48-2SS-15DX12C	SRS/OHC48-2P-15DX12C	SRS/OHC48-2L-15DX12C
60"	SRS/OHC60-2-15DX12C	SRS/OHC60-2SS-15DX12C	SRS/OHC60-2P-15DX12C	SRS/OHC60-2L-15DX12C
72"	SRS/OHC72-2-15DX12C	SRS/OHC72-2SS-15DX12C	SRS/OHC72-2P-15DX12C	SRS/OHC72-2L-15DX12C
84"	SRS/OHC84-2-15DX12C	SRS/OHC84-2SS-15DX12C	SRS/OHC84-2P-15DX12C	SRS/OHC84-2L-15DX12C
96"	SRS/OHC96-2-15DY12C	SRS/OHC06-255-15DV12C	SRS/OHC96-2P-15DY12C	SRS/OHC96-31-15DX13C



OVERHEAD CABINETS (CONT)

Overhead Cabinet Nexus Mounting Brackets

Brackets must be ordered for each overhead cabinet used. Comes in pairs.

PART NO.	FOR USE WITH
NX/OHC-BRK16	16" high cabinet
NX/OHC-BRK20	20" high cabinet
NX/OHC-BRK29	29" high cabinet



Overhead Cabinet Rear Mount Frame System

For mounting overhead cabinets above base cabinets without obstructiong any of the worksurface. Contact your Lista sales representative for details.



Lista overhead cabinets can attach to a Nexus frame for protected, secure above-worksurface storage of large, bulky items.



NEXUS SYSTEM PLASTIC BOX RAILS AND BACK STOPS

Plastic Box Rails

The plastic box rail is easily adjustable for ergonomic access. It can be mounted parallel to the worksurface or at a 15° angle. The rail is attached via a simple double-notch system. It can hold select Lista or other boxes that have hanger lips at the rear for attaching to a louvered panel.

Back Stops

Prevents items from rolling off worksurface. 3" in height. Painted to match frame.



Plastic B PART NO.	ox Rails	MAXIMUM # OF
		3" BOXES/RAIL
NXBR/24	24"	7
NXBR/30	30"	9
NXBR/36	36"	11
NXBR/42	42"	13
NXBR/48	48"	15
NXBR/60	60"	19



Back Stops PART NO.	USE WITH SECTION WIDTH
NXBS/24	24"
NXBS/30	30"
NXBS/36	36"
NXBS/42	42"
NXBS/48	48"
NXBS/60	60"